


#DP Decibel Plug Also known as "Dust Plug" for smoke/air

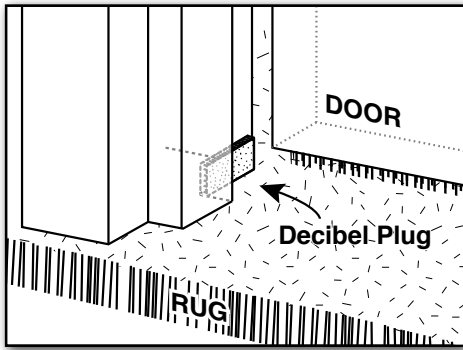

- Used to seal the bottom corners of the door for sound and smoke.
- Seal from the bottom of the door to the flooring surface on the rabbet.
- Used with all standard DHSI Door Bottoms where a higher STC rating is desired, and exterior applications.

#DP .250 - 1/4" #DP .375 - 3/8"


- Also used as a sound/smoke center seal at **DOUBLE EGRESS FRAMES AT HEADER #DP .375 APPLIED TO THE RABBET**

- Specify #105 x SA x DP .375 at double egress frames for a complete seal!

- Sold in 12" lengths. Cut to size in field.
- Adhesive-backed and easy to install.

#DPM 1.75 Sound Plug/Weather Seal

- ★ Apply to mullion for continuous sound attenuation/weatherseal.
- Self adhesive rigid backing is scored in 1/4" increments for "Select-A-Width": easy field separation to choose the width needed to fit the mullion.



#DPM 1.75 x length
Up to 10 foot lengths available
1 3/4" wide x 5/32" thick
Field separate for width as required

Architectural Details for "submittals": eliminate sales "cut sheets"

- Suggested to be used with a standard submittal
- Details can now be completed electronically. No Printing or faxing! Just hit 'send'.

Only DHSI has architectural details for the complete range of sealing system solutions helping contractors and distributors eliminate costly errors as commonly found in transition changes such as tile, carpet or VCT; color selection changes in door bottom, frame seals, transition strips (thresholds); undercut requirements for HVAC, etc.

Ask for sample details (from over 150) such as a mortise door bottom with "Solid Wood Edge (SWE)" and a marble threshold or for some specific requirement. Custom details available at no charge.

ACTIVE LINK

Send e-mail to DHSI requesting further information on Architectural Details

Sample Detail:

#AMDB Mortise Door Bottom

OTHER LENGTHS ARE AVAILABLE AND FIELD REPLACEABLE.

SOLID WOOD EDGE OPTION

SWE: Mortise ends before edge of door on lock edge. This allows edge of door to remain flush.

DOOR UNDERCUT	
CONFIRMED BY DISTRIBUTOR	
FT 2.75 THRESHOLD	3/4"
OTHER THRESHOLD (ACTUAL HEIGHT)	<input type="text"/>
RISER (IF USED) +	<input type="text"/>
CLEARANCE - SEE DRAWING +	<input type="text"/>
= UNDERCUT OF DOORS =	<input type="text"/>
ACTUAL WIDTH OF DOOR	<input type="text"/>
OPTIONAL: QTY REQUIRED	<input type="text"/>