
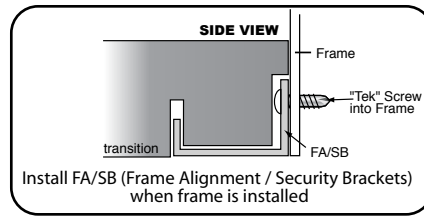
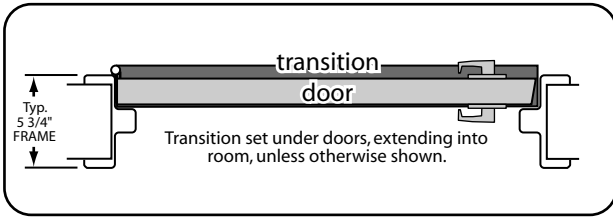
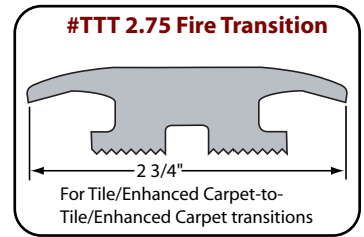
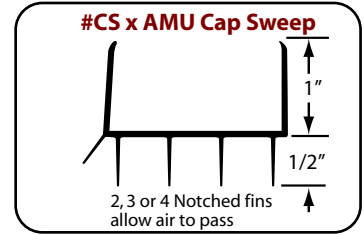
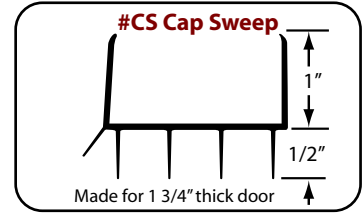


SUBMITTAL SHEET

**CAP SWEEP PART #CS36 or #CS36 x AMU
WITH DHSI FIRE TRANSITION PART # TTT 2.75**

PATENTS #7,062,881, 7,681,372, 8,051,605, 8,418,426 AND PATENTS PENDING CONSULT DHSI

DETAIL #CS-TTT
(confirm revision date with DHSI)

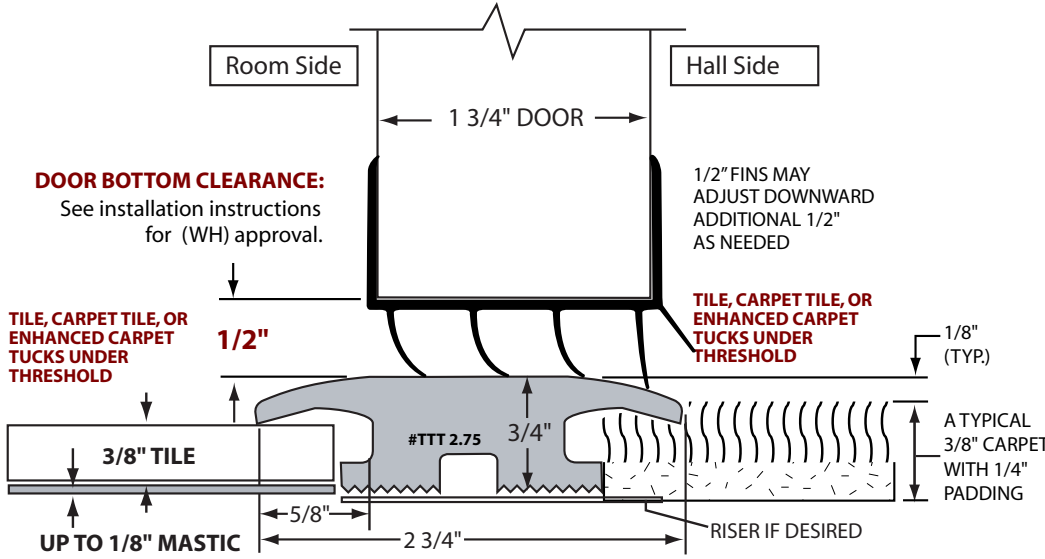

Complete as much information as possible and attach with submittals.
"Approval" as noted is required for order entry and warranty

1. Tile, Carpet Tile or 'enhanced carpet' on each side for all openings? **YES** **NO** If NO, explain below.
2. Thickness of flooring material shown is correct? **YES** **NO**
3. Is "Allowance and Means for Undercut" option for airflow under door needed? **YES** **NO**
If you require "AMU", minimum CFM Required: _____
If AMU is required DHSI can provide an architectural detail with 3/4" fins for approval.
4. Door Undercut is approved? **YES** **NO** APPROVED BY: GC ARCH OWN
5. Confirm color of Door Bottom? Dark Brown Off-White Black
6. Furnish FA/SB (Frame Alignment / Security Brackets) ? **YES** **NO**
7. Transition Strip Color? Black Dark Brown

DOOR UNDERCUT	
SUBMIT BY DISTRIBUTOR	
TTT 2.75 TRANSITION	<u>3/4"</u>
RISER (IF USED) +	<input type="text"/>
CLEARANCE - SEE DRAWING +	<input type="text"/>
= UNDERCUT OF DOORS =	<input type="text"/>
ACTUAL WIDTH OF DOOR	<input type="text"/>
OPTIONAL: QTY REQUIRED	<input type="text"/>

NOTES:

1. Cap Sweep listed up to 90 minutes by ITS (WH).
2. Doors without "AMU" option may use #DP Decibel Plug to increase STC ratings: see specs & HW sets.
3. Minimum 1/8" rise from top of carpet in room to top of transition under door.
4. Minimum clearance for CS shown is 3/8". Consult DHSI for details that may require smaller clearances.
5. #TTT Transition by DHSI. Set threshold with 3/4" extension into room unless otherwise indicated.
6. 1/16" engagement recommended to transition which will produce minimal closing interference.
7. Timely/Rediframes can be 3/16" longer than the standard hollow metal frame. You may need to deduct this 3/16" from the undercut dimensions to achieve the correct dimensioning.

Approval by Architect, Contractor or Construction Manager:

APPROVED: AS SUBMITTED
 EXCEPTIONS AS NOTED
NOT APPROVED: REVISE AND RESUBMIT

COMMENTS:

APPROVAL BY: _____ PROJECT NAME: _____
FIRM: _____ LOCATION (CITY/STATE): _____
DATE: _____