


# #SSDB3 Surface Door Bottom




- ★ **Double or Triple** seal for sound or weather.
- ★ With Slide Cover, available in various finishes
  - Snap-On Cover allows SSDB to be used with Floor Pivots.
  - Fully Adjustable with Concealed Screw Attachment.
  - For wood, hollow metal or Aluminum door applications.
  - Can be mounted on hall side or room side.
  - 1/2" standard flexible and durable inserts **Replaceable** for up to 1 1/4" gaps to extend range of sealing to match ANY undercut. **3/8", 1/2", 5/8", 3/4", 7/8", 1" inserts**
  - Inserts Warranted for Life of the Installation.
  - Looks and strength similar to a kickplate, with built-in Rain Drip.



**SOLID FINS AVAILABLE!**

- ★ Use DHSI Architectural Details for submittals.

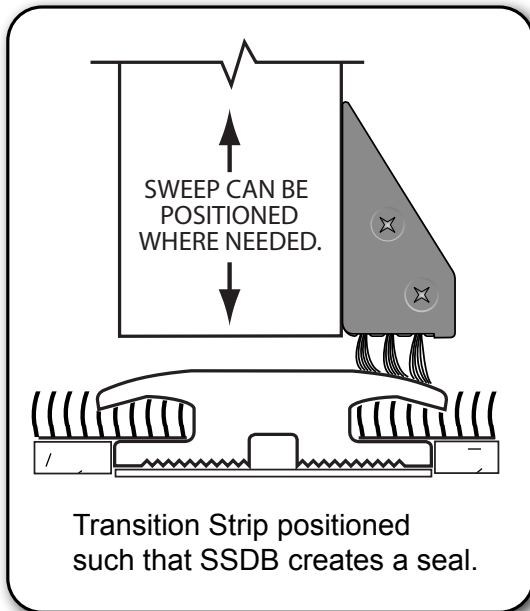


- ★ Available with the patented "AMU - Allowance and Means for Undercut" option: Allows air to pass. Still blocks light and offers sound attenuation.

**Patent #6,442,901 & Patents Pending. Consult DHSI**

## #SSDB Color Choices:

Duronodic Dark Bronze

Anodized Aluminum

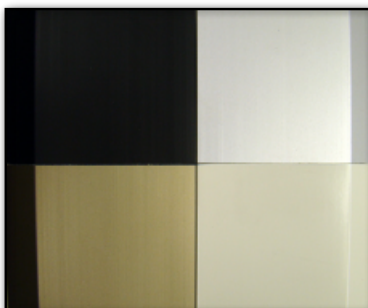

Anodized Champagne

Off-White


Colors may vary from actual parts due to printer or monitor settings

## #SSDB3 Surface Door Bottom x opening size

- **#SSDB3-3** ————— 3 standard inserts
- **#SSDB3-2** ————— 2 standard inserts
- **#SSDB3-2 x AMU** — 2 "AMU" inserts

Available in standard 35 3/4" size or any factory cut-to-size option

**Color Choices: Off-White, Duronodic Dark Bronze, Champagne and Anodized Aluminum**



Listed with ITS (Warnock Hersey) for use on fire doors up to 90 min,