



#SSDB3 Surface Door Bottom

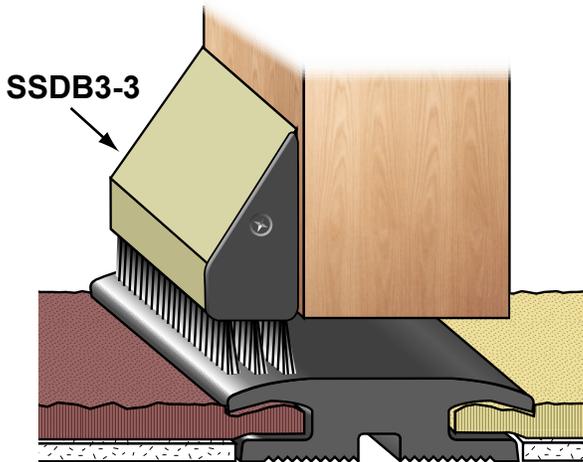



- ★ #SSDB3-3 ————— 3 standard inserts
- #SSDB3-2 ————— 2 standard inserts
- #SSDB3-2 x AMU — 2 AMU inserts

Designed with unique features:

- ★ With Slide Cover, available in various finishes
- ★ Fully Adjustable
 - For wood, hollow metal or Aluminum door applications.
 - Can be mounted on hall side or room side.
 - **1/2" standard flexible and durable inserts. Replaceable** pile to extend range of sealing, to match **ANY** undercut
 - **Double or Triple** seal for sound or weather.
 - Slim Profile - projection, Clean appearance
 - Gives looks and strength similar to a kickplate.
 - End caps secure inserts and create a "neat" edge.
- ★ Available with the patented "AMU - Allowance and Means for Undercut" option: Allows air to pass. Still blocks light and offers sound attenuation.
 - Patent #6,442,901 & Patents Pending. Consult DHSI



#CS Cap Sweep Door Bottom

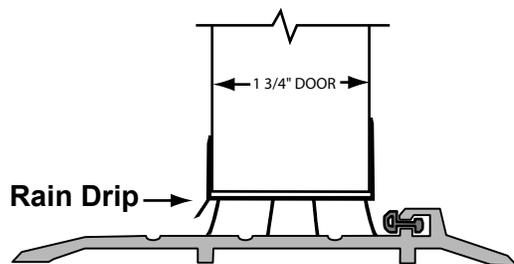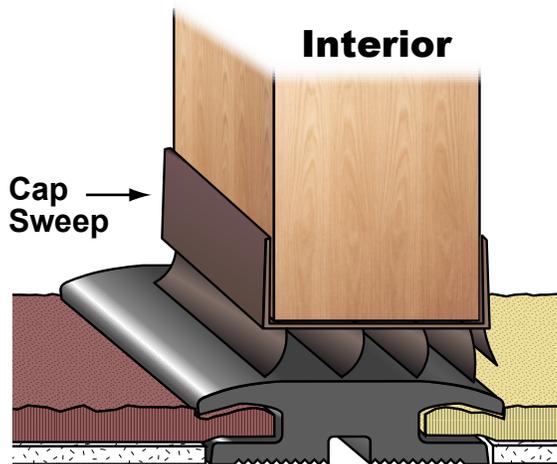

Exterior - outswing
Use with 1/4" Flat Threshold standard
1/2" Lo-Rise Latch track optional

Designed with unique features:

- ★ Fully Adjustable for out of level floors
 - ★ 1/2" fins and 1/2" adjustment.
 - Excellent for variable job conditions and excessive gaps on renovation work where thresholds are used.
 - Eliminates need for spring loaded automatic door bottom when threshold detail rises above carpet (within ADA - as detailed).
 - Quadruple seal for sound or weather seal.
 - Reduces service call-backs and complaints.
 - Available in Off-White and Dark Brown.
 - Request DHSI specific threshold detail for height, undercut and clearance dimensions.
 - Use with DHSI half saddle threshold at typical stairwell details.
 - ★ Available with the patented "AMU - Allowance and Means for Undercut" option: Allows air to pass. Still blocks light and offers sound attenuation.
 - #CS 36 ————— 35 3/4"
 - #CS 48 ————— 47 3/4"
 - #CS 36 x AMU-2 — 35 3/4" with 2 AMU fins
- Patent #6,442,901 & Patents Pending. Consult DHSI